



ABOUT LONSEAL®: "The Little Giant"

Celebrating over 46 years of durability and performance in a variety of commercial industries, Lonseal® offers a unique selection of resilient sheet vinyl flooring in exterior and interior, embossed, smooth, fitness and wood-grain surfaces. We provide finishes of exceptional beauty and utility which are as economical as they are exhilarating. Servicing a range of commercial applications including healthcare, education, fitness, corporate, retail, and hospitality, Lonseal's products are specified through architects and designers nationwide.

COMPANY HISTORY:

Lonseal, Inc. is a subsidiary of Lonseal Corporation in Tokyo and was established in Southern California in 1972. The company quickly established itself as a provider of unique flooring designs with distinctive color choices. In the early 80's, Lonplate — the original steel-plate design adapted to resilient flooring — put Lonseal on the map as a creator of innovative, embossed products. Additionally, Lonseal's technological advances bolstered the company's reputation as it infused products with pliable properties not typically associated with vinyl.

Lonseal® is known as "the little giant" in the resilient sheet vinyl flooring industry. Our corporate sales office in Carson, California, has a team with an average of 31 years of sheet vinyl experience! Our product line is most often specified by designers and architects because we focus on making one thing ... products that will over-deliver quality. Not only does our flooring exceed expectations, Lonseal is more flexible and can easily customize products to meet our clients' needs.

LONSEAL®

AFFILIATIONS, CERTIFICATIONS AND MEMBERSHIPS





















EXCLUSIVE LONSEAL® FORMULATIONS





CONTENTS

About Lonseal Page 1 Fitness Page 26
Topseal Page 3 Exterior Page 30
Embossed Page 5 Lonseal's GreenVinyl® Story Page 33
Smooth Page 14

1

FLOORING REIMAGINED

For over 18 years, Lonseal Corporation has proudly been certified to be in conformance with JIS Q 9001 (equivalent to AS9100), the International Quality Assurance Standard. Since inception, the company has adhered to the highest level of manufacturing and safety standards in the industry.

Additionally, Lonseal has long been a leader in eco-friendly manufacturing as evidenced by our GreenAir® Collection for low VOCs, our exclusive GreenMedic® anti-microbial formula, and FloorScore® certified products which support Indoor Air Quality (IAQ). See our GreenVinyl® story on page 33.

Lonseal® pushes the limits of conventional vinyl, leading the sheet vinyl flooring industry in exciting new directions through technological, visual, and textured innovations. Our inspiration comes from the environment in which we live. We create transitional designs that combine the best of traditional and contemporary compositions to create a classic look that never goes out of style. Our goal is to connect interior environments with the rest of humanity. We take an intellectual approach and invest our time in researching the right flooring designs for various interior environments. We design patterns that balances function with beneficial effects to create ... FLOORING REIMAGINED.



LONSEAL®



Londante #LD201 Blanca & #205 Verde



TOPSEAL Factory-Applied Urethane Finish

Saves time on maintenance Saves money on life-cycle costs Saves the environment


TOPSEAL IS...

- A factory-applied urethane finish that creates a "no-wax" floor. It protects, reduces scuffing and simplifies routine maintenance. It is now available as standard on Lonseal's most popular smooth and wood grain products.
- Applied as a surface coating measuring 30-microns three times thicker than most PUR finishes — and extends the life of the flooring by protecting it from wear due to staining and soiling.
- An eco-friendly formulation that incorporates Lonseal's GreenAir® technology for low VOCs as well as GreenMedic® for increased microbial resistance.
- Included in select Lonseal flooring products for commercial industries. All flooring products with the Topseal finish are FloorScore® certified

TOPSEAL

LONSEAL'S TOPSEAL PRODUCTS





LONDANTE

Londante features a hypnotic cross-hatch pattern that imparts a distinctly Italian flavor to any interior space. It's delicately-etched lines suggest intricate marble and stone textures, while saturated colors stand strikingly on their own or compliment a wide array of wood looks and solids. Available in 7 warm colors.



LONECO®

As Lonseal's foremost eco-friendly product, Loneco® is comprised of over 50% recycled content and features elegant organic colors that easily conceal scuffing and soiling. Loneco® has been utilized in such diverse commercial spaces as Evergreen Hospital in Washington and Volkswagen dealerships nationwide. Available in 16 pleasing neutral colors.



LONECO® LINEN

Utilizing the same Loneco® formulation of 50% recycled content, Loneco® Linen features a loose woven design that gives a hip, stylish touch to any interior space. An abstracted take on a fabric look, Loneco Linen suggests the delicacy of cloth while its hue variations and slightly pebbled texture provide strength and durability. Available in 7 elegant colors.



LONFLOOR GALVANIZED

Lonfloor Galvanized Topseal lends a striking industrial touch to any interior, from office break rooms to retail spaces. The subtle color choices offer warmth while the metallic design gives a polished, sophisticated appeal — particularly evident in the lustrous color, Brass! Available in 6 scintillating colors.



LONMOIRE

Moiré is a pattern that mimics fluid water-like movement. Lonmoire is a slightly textured flooring product that has rippled its way into healthcare spaces. This time-honored, French-based design is a beloved classic.

Available in 6 elegant colors.



Lonwood Natural #W7464 Summer Night & #W7459 Bark Dust

The Women's Center at Rockford Health System, Rockford, IL



LONSPECK

Lonspeck's pattern was designed with the right combination of speck size and sparsity to enhance spatial resolution for a better field of view. The Lonspeck pattern can help hide wear and tear, as well as conceal blemishes. This pattern adds detail to a room and brings character to an overall design. Available in 9 complimentary colors.



LONWOOD DAKOTA

This durable, slightly textured sheet evokes the open grain of oak and the nuance of knot-free plank in warm and inviting colors. Lonwood Dakota coordinates beautifully with Loneco® and is ideal for corporate and retail, as well as healthcare environments such as Northwestern University Imaging Center in Illinois and St. Louis Children's Hospital in Missouri. Available in 15 classic colors.



LONWOOD MADERA

A wide-plank design, Lonwood Madera features detailed graining that elegantly weaves around beautifully-rendered knotting. This extraordinarily realistic look is further enhanced by articulated plank lines resulting in a design that suggests the strength of old-world craftsmanship paired with the crisp, clean lines of contemporary living. Available in 6 lustrous colors.



LONWOOD NATURAL

Lonwood Natural has a realistic maple wood image with striking color schemes taken directly from nature. It has been a regular feature in healthcare, multi-family housing, and corporate settings including Balboa Naval Hospital in California, Mount Sinai Hospital in New York, and Malama Ki Ola Health Center in Hawaii. Available in 14 wide-ranging colors.



LONZEBRA

The exciting pattern of African Zebrawood comes to life in Lonseal's Lonzebra collection, featuring a striated linear pattern that is not only visually extraordinary but also serves to mask dirt and other blemishes. The inherent drama of this collection is typified by the color addition, Falcon. Available in 7 exotic colors.



Lonwood Natural #W7462 Gentle Wind & #W7466 Babbling Creek

Ocean Medical Pediatric Center, Brick, NJ



ASB Bank Services, New Zealand

(Architect: CPRW Fisher | Designer: Ray Lind | Installer: Lovich Flooring)



LONBEAD

One of Lonseal's most striking offerings, LONBEAD is a luxuriously textured surface consisting of an embossing of small bead-like drops that form a richly glossy and elegant design. The opulent color palette is timelessly chic and has enlivened numerous display, retail and hospitality spaces.

* Due to the light color of #B301 Opal, Lonseal highly recommends the use of six coats of finish. More frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.



EMBOSSED LONBEAD

Lonbead #B303 Onyx - Li & Fung NYC



B301 OPAL*



B303 ONYX



B304 AQUAMARINE



B305 MOONSTONE



B306 CHAMPAGNE GARNET

FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m)

Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.100 in. (2.5 mm)

Wear Layer Thickness: 0.035 in. (0.9 mm)

Weight: 0.8 lbs./sq. ft., 275 lbs./roll

ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2 Low-Emitting Materials

LONCOIN I

One of Lonseal's pioneering designs in the field of slip-resistant embossing, LONCOIN I has been demonstrating its outstanding resilience capabilities in high-traffic interiors for decades. With its nickel-sized coin stamping, Loncoin I offers stylish, low-maintenance flooring in two practical color options.



EMBOSSED LONCOIN I









C124 GRAY

 FEATURES (sizes shown are nominal)

 Roll Width:
 6 ft. (1.8 m)

 Roll Length:
 60 ft. (18.3 m)

 Overall Thickness:
 0.100 in. (2.5 mm)

 Wear Layer Thickness:
 0.031 in. (0.80 mm)

 Weight:
 0.8 lbs./sq. ft., 280 lbs./roll

ASTM F1303 CLASSIFICATION:


Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2

Low-Emitting Materials

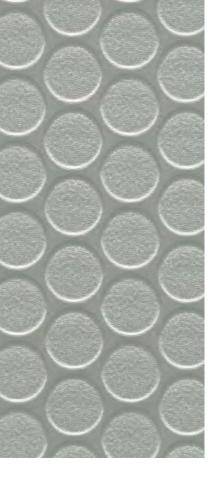

EMBOSSED LONCOIN II

LONCOIN II

The Loncoin series boasts a coin surface embossing that delivers a striking directional design a decorative touch that provides style, enhanced traction, functional, and hides scuffing. LONCOIN II features a slight texture on the coin stamping which gives surface grip and helps mask scuffing.

* #CN183 Sonic Gray and #CN187 Cerulean Blue are iridescent colors, and their shades will change depending on the viewing angle. Please request a sample swatch for color accuracy.



Loncoin II #CN183 Sonic Gray - Jewish Heritage Center Computer Room, NY, NY



CN181 NIMBUS GRAY



CN183 SONIC GRAY*



CN187 CERULEAN BLUE*



CN190 BIRCH WHITE



CTB736 STONE GRAY (8' ONLY)

FEATURES (sizes shown are nominal)

 Roll Width:
 6 ft. (1.8 m) or 8 ft. (2.4 m)

 Roll Length:
 60 ft. (18.3 m)

 Overall Thickness:
 0.100 in. (2.5 mm)

 Wear Layer Thickness:
 0.035 in. (0.9 mm)

 Weight 6 ft.:
 0.8 lbs/sq. ft., 295 lbs/roll

 Weight 8 ft.:
 0.8 lbs/sq. ft., 385 lbs/roll

ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class B, Commercial Use


EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: 20%-40% Post-Industrial Recycled Content


LONCOIN II FLECKS

Taking advantage of its predecessors' embossing and texturing features, LONCOIN II FLECKS adds multi-colored speckled patterning for enhanced character. The dazzling fleck coloration provides camouflage for simpler maintenance.

*Please note that #C150 Onyx, #C152 Sapphire, #C154 Sandstone and #C157 Moonstone are available in both 6' (1.83 m) and 8' (2.44 m) rolls. All other colors are available in 6' (1.83 m) rolls only unless custom ordered.

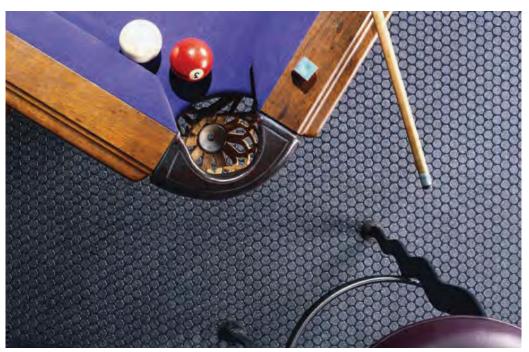

Loncoin II Flecks #C152 Sapphire

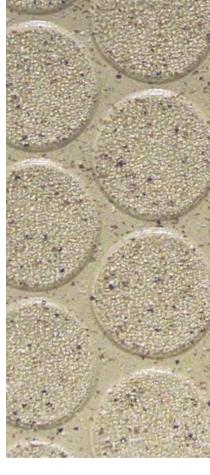

EMBOSSED

LONCOIN II FLECKS



C150 (6') C8150 (8') ONYX*



C152 (6') C8152 (8') SAPPHIRE*



C154 (6') C8154 (8') SANDSTONE*



C155 (6') JADE



C157 (6') C8157 (8') MOONSTONE*

FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m) or 8 ft. (2.4 m) Roll Length: 60 ft. (18.3 m)

 Overall Thickness:
 0.100 in. (2.5 mm)

 Wear Layer Thickness:
 0.031 in. (0.8 mm)

 Weight 6 ft.:
 0.8 lbs./sq. ft., 290 lbs./roll

 Weight 8 ft.:
 0.8 lbs./sq. ft., 385 lbs./roll

ASTM F1303 CLASSIFICATION:


Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1

Sourcing of Raw Materials Option 2 Low-Emitting Materials

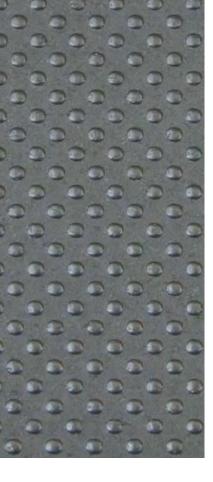

EMBOSSED

LONPEARL

LONPEARL

The studded embossing and deeply saturated colors of LONPEARL offer a stylishly textured surface with excellent camouflaging capabilities. Perfect for high-traffic retail areas as well as corporate spaces in search of a dynamic statement.

* Due to the light color of #P714 Arctic White, more frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.



Lonpearl #P713 Baleen Gray



P712 CASPIAN MIST



P713 BALEEN GRAY



P714 ARCTIC WHITE*



P715 ABALONE GREEN



P716 MARLIN SILVER



P717 ORCA BLUE



P718 ODESSA BLACK

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2 Low-Emitting Materials

20%-40% Post-Industrial Recycled Content

FEATURES (sizes shown are nominal)

9

LONPLATE I

LONPLATE I offers the rugged endurance of classic steel plating. This durable resilient sheet flooring is Lonseal's toughest skid-resistant vinyl. Perfect for heavy-duty applications in all kinds of interior spaces.



EMBOSSED

LONPLATE I





P161 METALLIC GRAY



BLACK



GUNMETAL



P165 SAPPHIRE



P168 TITANIUM



P176 PEWTER

FEATURES (sizes shown are nominal) Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) 0.140 in. (3.5 mm) Overall Thickness: Wear Layer Thickness: 0.106 in. (2.7 mm) Wear Layer Thickness

for P168 Titanium only: 0.040 in. (0.8 mm) Weight: 0.8 lbs./sq. ft., 275 lbs./roll ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 **Low-Emitting Materials**



EMBOSSED

LONPLATE II

LONPLATE II

Every bit as tough as the original, but with smaller embossing and wider spacing. LONPLATE II offers a similar steel-plate pattern that combines the durability of industrial design with six deeply saturated colors.

* Please note that #P421 Mica, #P424TX Gunpowder and #P443TXM Midnight are available in both 6 foot (1.83 m) and 8 foot (2.438 m) rolls (8' rolls have a thinner gage of 2.0 mm thickness). All other colors are available in 6 foot (1.83 m) rolls only unless custom ordered.



Lonplate II #P421 Mica - 24 Hour Fitness, Texas



P411 PUTTY



P419TX BRICK



P421 (6') P8421 (8') MICA*



P424 GUNMETAL



P424TX (6') P8424TX (8') GUNPOWDER*



P443TXM (6') P8443TXM (8') MIDNIGHT*

FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m) or 8 ft. (2.4 m)
Roll Length: 60 ft. (18.3 m)
Overall Thickness 6 ft.: 0.120 in. (3.0 mm)
Overall Thickness 8 ft.: 0.100 in. (2.5 mm)

 Wear Layer Thickness:
 0.059 in. (1.5 mm)

 Weight 6 ft.:
 0.8 lbs./sq. ft., 285 lbs./roll

 Weight 8 ft.:
 0.6 lbs./sq. ft., 295 lbs./roll

ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2

Low-Emitting Materials

LONPLATE PATINA

LONPLATE PATINA is resilient sheet vinyl surface with high-tech metallic coloring and a classic diamond plate embossing. The exclusive galvanized coloration provides excellent camouflage for scuffing and wear pairing the aesthetics of iron with ease of vinyl maintenance. Great for providing a high-tech industrial look.





LONPLATE PATINA







P538 EMPIRE SILVER

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

Lonplate Patina #P537 Palace Gray

CERTIFIED: FloorScore®


EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2

Low-Emitting Materials

20%-40% Post-Industrial Recycled Content

FEATURES (sizes shown are nominal) Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.100 in. (2.5 mm) Wear Layer Thickness: 0.031 in. (0.8 mm) Weight: 0.8 lbs./sq. ft., 305 lbs./roll

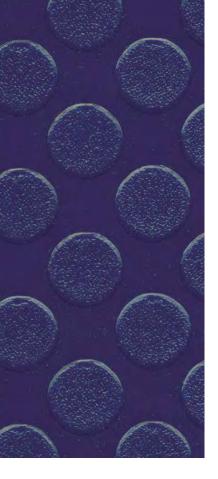

EMBOSSED

LONPOINT MOONWALK

LONPOINT MOONWALK

LONPOINT MOONWALK is similar to our Loncoin series, but is distinguished by smaller (half-inch diameter) and more widely-spaced coin stamping. The slip-resistance feature makes it ideal for busy traffic areas like break rooms and hallways while the intriguing color scheme adds a distinctive designer touch.

* #352 Sapphire and #354 Graphite are iridescent colors, and their shades will change depending on the viewing angle. Please request a sample swatch for color accuracy.



Lonpoint Moonwalk #P353 Black



P345 BLUE



P348 SLATE



P351 PLATINUM



SAPPHIRE*



BLACK



GRAPHITE*

FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.031 in. (0.8 mm) Weight: 0.7 lbs./sq. ft., 240 lbs./roll ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 Low-Emitting Materials

LONDANTE Topseal

Featuring one of the warmest, yet boldest palettes that Lonseal has ever offered. LONDANTE is a resilient sheet vinyl that comes in seven intriguing colors and features a hypnotic crosshatch pattern that imparts a distinctly Italian flavor to any interior space, from corporate offices to hospitality spaces to healthcare patient rooms.

Londante is PHTHALATE FREE and also features Lonseal's exclusive Topseal formulation. See page 3 for more information on Topseal.



Londante #LD201 Blanca - York Walk In Hospital, York, Maine



LD200



LD201 BLANCA



TEMPESTA



LD203 CELESTE



LD204 TERRACOTTA



SMOOTH

LONDANTE

Topseal

LD205 VERDE

LD206

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2

Low-Emitting Materials

 FEATURES (sizes shown are nominal)

 Roll Width:
 6 ft. (1.8 m)

 Roll Length:
 60 ft. (18.3 m)

 Overall Thickness:
 0.080 in. (2.0 mm)

 Wear Layer Thickness:
 0.020 in. (0.5 mm)

 Weight:
 0.7 lbs./sq. ft., 240 lbs./roll



LONECO® Topseal

As Lonseal's foremost eco-friendly product, LONECO® is composed of 50% recycled content and features Lonseal's exclusive GreenAir® technology that reduces VOC emissions and contributes to superior indoor air quality.

Loneco® comes standard with Lonseal's exclusive Topseal formulation. See page 3 for more information on Topseal.



SMOOTH LONECO® Topseal

Loneco® #E7234 Sand Dune - William L. Clay Sr. Early Childhood Development/Parenting Education Center, St. Louis, MO



FEATURES (sizes shown are nominal)
Roll Width: 6 ft. (1.8 m)
Roll Length: 60 ft. (18.3 m)

 Overall Thickness:
 0.080 in. (2.0 mm)

 Wear Layer Thickness:
 0.031 in. (0.8 mm)

 Weight:
 0.6 lbs./sq. ft., 210 lbs./roll

EXCLUSIVE LONSEAL® FORMULATIONS:
GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Opt 1 Sourcing of Raw Materials Opt 2 Low-Emitting Materials

LONECO® LINEN Topseal

Utilizing the same formulation of 50% recycled content as Lonseal's popular Loneco® line, LONECO® LINEN features a loose woven design that gives a hip, stylish touch to any interior space. An abstracted take on a fabric look, Loneco® Linen suggests the delicacy of cloth while its hue variations and slightly stubbed texture provide strength and durability.

Loneco® Linen also features Lonseal's exclusive Topseal formulation. See page 3 for more information on Topseal.



Loneco® Linen #EL332 Heather - (break room) Colony Capital, Inc., Los Angeles, CA

WHEAT



SMOOTH LONECO® LINEN **Topseal**









HEATHER



ASH





ARTICHOKE

EL336 **PORPOISE**

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2

Low-Emitting Materials

50% Post-Industrial Recycled Content

FEATURES (sizes shown are nominal) Roll Width: 6 ft. (1.8 m) 60 ft. (18.3 m) Roll Length: Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.020 in. (0.5 mm) Weight: 0.6 lbs./sq. ft., 225 lbs./roll



LONFLOOR GALVANIZED Topseal

LONFLOOR GALVANIZED takes on the look of galvanized metal in a simpler, more industrial direction. The subtle color choices offer warmth, while the stone-like aesthetic has a polished, sophisticated appeal. Lonfloor Galvanized also features Lonseal's exclusive Topseal formulation. See page 3 for more information on Topseal.

* Due to the light color of #F7240 White Diamond, more frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.



SMOOTH **LONFLOOR GALVANIZED Topseal**

Lonfloor Galvanize Topseal #F247 Granite



F7240 WHITE DIAMOND*



F7241 PLATINUM



F7243 BLACK PEARL



F7244 GRAPHITE



F7247 GRANITE



F7264 BRASS

FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.031 in. (0.8 mm)

Weight: 0.6 lbs./sq. ft., 220 lbs./roll ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 Low-Emitting Materials

LONFLOOR PLAIN

The simplicity of LONFLOOR PLAIN's smooth-as-mercury surface and subdued color palette give it infinite application possibilities. Its classic elegance can instantly upgrade the most humble interior or put the finishing touch on any high-end space.

* Due to the light color of #F30 Parchment, more frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.



SMOOTH LONFLOOR PLAIN

Lonfloor Plain #F35 Night













FEATURES (sizes shown are nominal)

 Roll Width:
 6 ft. (1.8 m)

 Roll Length:
 60 ft. (18.3 m)

 Overall Thickness:
 0.100 in. (2.5 mm)

 Wear Layer Thickness:
 0.031 in. (0.8 mm)

 Weight:
 0.7 lbs./sq. ft., 265 lbs./roll

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2 Low-Emitting Materials

LONMETRO UV

The urban flavor of LONMETRO UV fuses three colors with a UV-cured (urethane) protection layer that minimizes maintenance. Lonmetro UV shakes up the look of any space, but particularly those in retail, display and showrooms.

* Due to the light color of #668 Loading Zone, more frequent maintenance procedures are necessary to ensure a long lasting installation. In addition, areas of prolonged UV exposure should be avoided to prevent unwanted discoloration of the flooring.



SMOOTH LONMETRO UV

Lonmetro UV #M662UV Black Limo



M660UV FIRE HYDRANT



M662UV BLACK LIMO



M668UV LOADING ZONE*

FEATURES (sizes shown are nominal)
Roll Width: 6 ft. (1.8 m)
Roll Length: 60 ft. (18.3 m)
Overall Thickness: 0.080 in. (2.0 mm)
Wear Layer Thickness: 0.031 in. (0.8 mm)

Wear Layer Thickness:

for M668UV Loading Zone: 0.018 in. (0.45 mm)
Weight: 0.6 lbs./sq. ft., 210 lbs./roll

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®


LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2

Low-Emitting Materials

LONMOIRE Topseal

LONMOIRE's wood grain pattern has the characteristics of watery waves of lines. This ripple design was once coveted by queens. It distinguishes the centuries-old pattern that now gives everyday commercial spaces a genteel touch.

Lonmoire is PHTHALATE FREE and also features Lonseal's exclusive Topseal formulation. See page 3 for more information on Topseal.

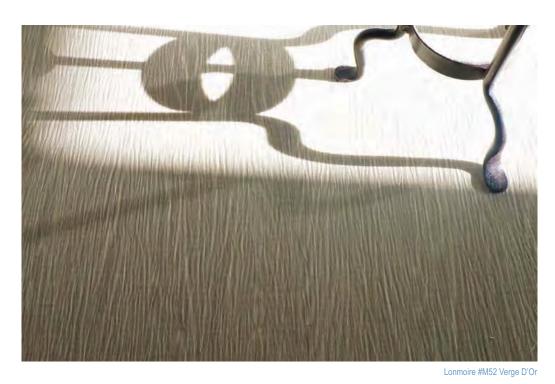



Topseal















BLANC

VERGE D'OR

D'OR

M54 **GRIS**

NOIR

BRUN

FEATURES (sizes shown are nominal) Roll Width: 6 ft. (1.8 m) 60 ft. (18.3 m) Roll Length: Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.020 in. (0.5 mm) Weight: 0.7 lbs./sq. ft., 240 lbs./roll ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 **Low-Emitting Materials**

LONSPECK Topseal

The speckled surface of LONSPECK easily hides scuffing. The nine therapeutic colors available make Lonspeck an exceptionally flexible option in commercial spaces, including healthcare, offices, and education facilities.

Lonspeck also features Lonseal's exclusive Topseal formulation. See page 3 for more information on Topseal.



SMOOTH **LONSPECK**

Topseal

Lonspeck #SX111 Tiwilight Zone



TWILIGHT ZONE



SX112 MAGNETIC GRAY



SX113 **ROCKY BEACH**



SX114 TAMARIND



SX115 SANDSTORM



WHITE PEPPER



SX117 HALE NAVY



SX118 VANILLA BEAN



SX119 PIGEON GRAY

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 Low-Emitting Materials

FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.028 in. (0.7 mm)

0.6 lbs./sq. ft., 225 lbs./roll

LONWOOD DAKOTA Topseal

LONWOOD DAKOTA is a slightly textured sheet that evokes the open grain of oak and the nuance of knot-free, quarter-sawn plank. Ideal for corporate, healthcare, retail and hospitality applications. Lonwood Dakota comes standard with Lonseal's exclusive Topseal formulation. See page 3 for more information on Topseal.

This product contains partial "boards" at both edges. This selvage should be removed to assure an aesthetically pleasing transition from sheet to sheet. The selvage width can vary depending on the lot.



Lonwood Dakota #W7093 Marshmallow and #W7077 Natural Oak Prebys Cardiovascular Institute Scripps Memorial Hospital, La Jolla, CA | HOK Los Angeles | Stephen Whalen Photography



W7077 NATURAL OAK



W7078

W7084 ISLAND WHITE

W7095

HONEY CAKES



W7087 **EBONY**



W7096 **PUMPKIN PIE**



W7079

W7088

PARLOR OAK

CHERRY

W7097 HOT CHOCOLATE

FEATURES (sizes shown are nominal) Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.020 in. (0.5 mm) 0.6 lbs./sq. ft., 230 lbs./roll Weight:



W7081 BURGUNDY



W7089 WARM TEA



W7082 **GOLDEN OAK**



W7093 MARSHMALLOW



W7083 PLATINUM MIST



W7094 TOASTED ALMOND



CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 Low-Emitting Materials




SMOOTH LONWOOD DAKOTA **Topseal**



LONWOOD MADERA Topseal

A wide-plank design, LONWOOD MADERA features detailed graining that weaves around beautifully-rendered knotting. This realistic look is further enhanced by articulated plank lines resulting in a design that suggests the strength of old-world craftsmanship paired with the crisp, clean lines of contemporary living. Madera's plank lengths are 32" and 16," with a plank width of

Lonwood Madera comes standard with Lonseal's exclusive Topseal formulation. See page 3 for more information on Topseal.

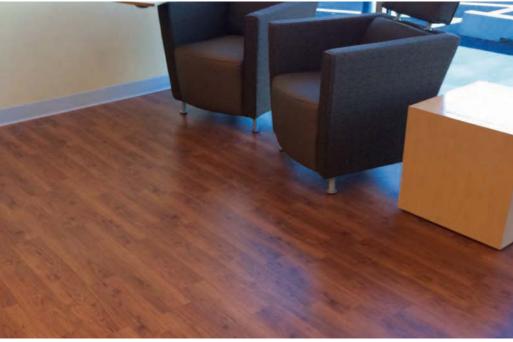

SMOOTH **LONWOOD MADERA Topseal**

Lonwood Madera Topseal #W134 Brandy



W130 SHORTBREAD



W131 PORTOBELLO



W132 **OREGANO**



W133 CARAMEL



W134 **BRANDY**



W135 COCOA

FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.020 in. (0.5 mm) Weight: 0.6 lbs./sq. ft., 225 lbs./roll ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 Low-Emitting Materials

LONWOOD NATURAL Topseal

LONWOOD NATURAL pairs the timeless aesthetics of wood with the benefits of high-performance sheet vinyl in colors that range from earthy to quirky. Its soft grain patterning and smooth surface make Lonwood Natural ideal for those who want the warmth of wood with easier maintenance.

Lonwood Natural comes standard with Lonseal's exclusive Topseal formulation. See page 3 for more information on Topseal.



Lonwood Natural #W7457 Buckwheat, #W7455 Nutshell, #W7465 Rainfall - Norton Children's Hospital, Kentucky



SMOOTH **LONWOOD NATURAL**

Topseal



W7452 MAPLE SYRUP





W7461 WHISPER



W7455 NUTSHELL



W7462 **GENTLE WIND**



W7456 **QUAIL EGGS**



THUNDERSTORM



W7457 **BUCKWHEAT**



SUMMER NIGHT



W7458 **BRIAR ROOT**



W7465 RAINFALL



W7459

BARK DUST

BABBLING CREEK



W7467 SINGING BIRDS

FEATURES (sizes shown are nominal) Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm) Wear Layer Thickness: 0.020 in. (0.5 mm) 0.6 lbs./sq. ft., 225 lbs./roll Weight:

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2

Low-Emitting Materials



SMOOTH

LONZEBRA

Topseal

LONZEBRA Topseal

LONZEBRA's striated linear pattern is not only visually extraordinary but also serves to mask dirt and other blemishes. The exotic colors and patterning are striking on their own but also have exciting pairing potential with other Lonseal Topseal products.

Lonzebra comes standard with Lonseal's exclusive **Top**seal formulation. See page 3 for more information on Topseal.



Lonzebra Topseal #LZ7063 Savanna & #LZ7068 African Sunset - York Walk-In Medical Care Clinic, York, ME



LZ7059 FALCON



LZ7060 TWILIGHT



LZ7061 RAVEN



LZ7063 SAVANNA



LZ7066 BARK



LZ7068 AFRICAN SUNSET



LZ7069 SIENNA PLAINS

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class B, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2

Low-Emitting Materials

20%-35% Post-Industrial Recycled Content

FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m)

Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.080 in. (2.0 mm)

Wear Layer Thickness: 0.020 in. (0.5 mm)

Weight: 0.6 lbs./sq. ft., 230 lbs./roll

LONCOURT I

LONCOURT I is specifically designed for interior sport facilities where outstanding resilience, durability and low maintenance are desired. It boasts sound-absorbing construction, simple installation and ease of maintenance, and is excellent for interior gymnasium, multi-purpose fitness room environments, commercial and institutional use. Loncourt I also meets all NCAA requirements for bounce, can hold up to the impact of retractable bleachers, and accepts painted game lines and graphics.



SMOOTH **LONCOURT I**



COURT1 MAPLE



BUCKWHEAT

FITNESS

FEATURES (sizes shown are nominal) Roll Width: 6 ft. (1.8 m) Roll Length: 50 ft. (15.2 m) Overall Thickness: 0.190 in. (4.8 mm) Wear Layer Thickness: 0.031 in. (0.8 mm) - 1,

0.020" (0.5 mm) - CT38 1.6 lbs./sq. ft., 470 lbs./roll Weight:

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 Low-Emitting Materials

20%-40% Post-Industrial Recycled Content

26



LONCOURT UV

LONCOURT UV pairs the durability and aesthetics of the original Loncourt flooring with a factory-applied urethane finish for easier maintenance. This reduces the lifetime cost of the floor by eliminating the need to reapply coats of finish over time.



SMOOTH LONCOURT UV

Loncourt UV #CT838UV Buckwheat - Apartment Complex in Chicago, IL

FITNESS



 FEATURES (sizes shown are nominal)

 Roll Width:
 6 ft. (1.8 m)

 Roll Length:
 50 ft. (15.2 m)

 Overall Thickness:
 0.190 in. (4.8 mm)

 Wear Layer Thickness:
 0.024 in. (0.6 mm)

 Weight:
 1.6 lbs./sq. ft., 485 lbs./roll

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2 Low-Emitting Materials

LONWOOD PERFORMA

LONWOOD PERFORMA features an anti-fatigue, cushioned-step, closed-cell foam-backing that is designed specifically for high-traffic and high-impact aerobic and fitness activities. A wood-grain sheet, it is ergonomically designed, sound absorbing and helps prevent injuries. Ideal for fitness, gym, and yoga (including hot yoga) applications.



LONWOOD PERFORMA

SMOOTH



W547 SABLE



W548 OAK



W549 SILVER LAKE



W550 BUCKWHEAT



MOCHA LATTE

FITNESS

FEATURES (sizes shown are nominal) Roll Width: 6 ft. (1.8 m) Roll Length: 60 ft. (18.3 m) 0.220 in. (5.5 mm) Overall Thickness: Wear Layer Thickness: 0.020 in. (0.5 mm) 1.3 lbs./sq. ft., 455 lbs./roll Weight:

ASTM F1303 CLASSIFICATION: Type I, Grade 1, Class C, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: **Environmental Product Declarations Option 1** Sourcing of Raw Materials Option 2 Low-Emitting Materials 10% Post-Industrial Recycled Content



LONWOOD WITH FOAM

Ideal for fitness and gymnasium facilities, LONWOOD WITH FOAM features an anti-fatigue, cushioned-step, closed-cell foam-backing that is well suited to high-traffic interiors. Lonwood with Foam features 10% recycled content.



Lonwood With Foam #W375 Foam Buckwheat - Texas Children's Hospital, Houston, TX

SMOOTH LONWOOD WITH FOAM

FITNESS



W375 FOAM BUCKWHEAT



W382 FOAM GOLDEN OAK

 FEATURES (sizes shown are nominal)

 Roll Width:
 6 ft. (1.8 m)

 Roll Length:
 60 ft. (18.3 m)

 Overall Thickness:
 0.120 in. (3.0 mm)

 Wear Layer Thickness:
 0.020 in. (0.5 mm)

Weight: 0.7 lbs./sq. ft., 265 lbs./roll

ASTM F1303 CLASSIFICATION:

Type I, Grade 1, Class C, Commercial Use

CERTIFIED: FloorScore®

EXCLUSIVE LONSEAL® FORMULATIONS: GreenAir® & GreenMedic®

LEEDv4 CONTRIBUTION B+C INTERIORS: Environmental Product Declarations Option 1 Sourcing of Raw Materials Option 2

Low-Emitting Materials

LONDECK

Lonseal's LONDECK series features resilient exterior sheet vinyl with slightly embossed surfaces that withstand high volumes of pedestrian traffic and weather-wear. Due to its versatility, Londeck has been utilized in spaces such as pools, hotel and condo decks, and stairways. Though specifically designed for exterior spaces, the Londeck line is equally appropriate for interiors.



LONDECK





D750 TUDOR BROWN



D776

DARTMOUTH

D771 SHAKER BEIGE



D752 FAIRMONT **GREEN**



D753 KENSINGTON BROWN



D754 PACIFIC SAND





D758 PHILIPSBURG **BLUE**



D759 BRIARWOOD









LONDECK SIERRA

Mimicking the look of stucco with a slightly more subtle and crevassed surfacing than our regular Londeck offering, LONDECK SIERRA is similarly waterproof, weather-tolerant and holds up to heavy foot traffic.

* Please note that #D721 Sierra Cliff Face and #D723 Mount Tan are available in both 6 foot (1.83 m) wide and a width of 102" (8 foot with 2-1/2 selvage per edge). All other colors are available in 6 foot (1.83 m) wide rolls only unless custom ordered.



Londeck Sierra #D721 Sierra Cliff Face - Crescent Condos, St. Louis, MO

EXTERIOR

EMBOSSED

LONDECK SIERRA



D721 SIERRA CLIFF FACE*



D723 MOUNT TAN*



D725 SIERRA STONE



D726 FAIRMOUNT GREEN



D727 PLATINUM



D729 TITANIUM

Londeck Sierra #D721 Sierra Cliff Face



FEATURES (sizes shown are nominal)

Roll Width: 6 ft. (1.8 m) or 8 ft. (2.4 m) Roll Length: 60 ft. (18.3 m) Overall Thickness: 0.080 in. (2.0 mm)

Wear Layer Thickness: 0.031 in. (0.8 mm) Weight 6 ft.: 0.6 lbs./sq. ft., 210 lbs./roll Weight 8 ft., 6in.: 0.6 lbs./sq. ft., 400 lbs./roll

LONDECK SOL

As part of Lonseal's exterior flooring series, LONDECK SOL is a resilient exterior sheet vinyl with a cool-touch technology that reflects the sun's rays and reduces the surface temperature up to 10%. Londeck Sol exhibits a leather grain pattern. It withstands high volumes of pedestrian traffic and weather-wear. Because of its versatility, Londeck Sol can be utilized in spaces such as pools, hotel and condo decks, boats and stairways.

Roll Size: 8'6" (2.59 m) wide x 60' (18.3 m).





EMBOSSED LONDECK SOL

EXTERIOR

Londeck #D991 Clay Dust



D991 CLAY DUST



D992 OVERCAST



D993 PURE EARTH



D994 DESERT KHAKI



FEATURES (sizes shown are nominal)

Roll Width: 8 ft. 6 in. (2.59 m)

Roll Length: 60 ft. (18.3 m)

Overall Thickness: 0.080 in. (2.0 mm)

Wear Layer Thickness: 0.031 in. (0.08 mm)

Weight: 0.6 lbs./sq. ft., 295 lbs./roll

32



GREENVINYL®

LONSEAL'S GREENVINYL® STORY

As an environmentally-conscious manufacturer, Lonseal provides the most functional, beautiful, sustainable, and high-performance products available.

Lonseal® has been distributing resilient sheet vinyl in the United States since 1972. Our flooring is among the most visually striking and distinctive in the market. Lonseal has a number of eco-friendly features such as a pre-applied urethane finish, Topseal. This finish reduces maintenance efforts. It also adds durability and product longevity that far exceeds most other flooring options.

The GreenAir® Collection is Lonseal's suite of low VOC and FloorScore® certified resilient vinyl products which support Indoor Air Quality (IAQ). Along with the exciting development of low VOC vinyl flooring, Lonseal is continuously exploring new methods and technologies to minimize impact on the environment.

Among Lonseal's GreenVinyl® features:

- Lonseal's interior flooring products contribute towards LEEDv4 Building Product Disclosure and Optimization: Environmental Product Declarations (Option 1). This qualifies our materials and sources with industry-wide EPD. Lonseal's interior flooring products also contribute towards Sourcing of Raw Materials (Option 2), which means our products have post-industrial recycled content that ranges from 10-20%. All of our interior flooring products and our adhesive products have the Indoor Environmental Quality Credit. This credit shows that we met the General Emissions Evaluation and VOC content requirements.
- Lonseal obtains it flooring product from a facility that has certifications from the ISO (International Organization for Standardization): ISO 9001 Quality Management Systems and ISO 14001 Environmental Management Systems. ISO is a rigorous external third-party verification process that ensures Lonseal's compliance to its own internal standards and to ever-changing environmental laws and regulations.
- The GreenAir® Collection features products that are low VOC-emitting.
- Our GreenMedic[®] formulation features increased infection control through our exclusive antimicrobial formulation.
- We have FloorScore® certification from the Resilient Floor Covering Institute (RFCI) and Scientific Certification Systems which independently test and certify flooring products for compliance with indoor air quality emission requirements.
- Lonseal is a member of and meets the standards for the Collaborative for High Performance Schools (CHPS). CHPS is a green building rating program especially designed for schools.

While vinyl manufacturers have made great progress in recent years, Lonseal is never satisfied with the status quo. We are always striving to raise the green bar with ever-more eco-friendly products with the development of our GreenVinyl® formulations.

We have also greatly increased our use of recycled pre-consumer (post-industrial) content. Lonseal products have an average of 20% recycled product while our Loneco® line features over 50% recycled content. We have also introduced a range of products with Topseal, a UV-cured, factory-applied, urethane-finish. Due to their low-maintenance and matte finish, products with Topseal reduce the use of chemicals from finishes and strippers.

There will always be more to come. Lonseal continues to explore new production technologies and formulation methods in order to create the most eco-friendly flooring options for commercial industries.

BENEFITS OF LONSEAL® SHEET VINYL FLOORING

Lonseal specializes in resilient sheet vinyl flooring, with products available in a wide variety of colors, styles, and patterns. Its durability, practicality, and value have made it a popular choice in multiple types of applications for many decades.

WHY VINYL?

Vinyl is an extremely versatile component. When used in flooring products, specifically in sheet goods, it creates flexible yet durable flooring. Additionally, vinyl is environmentally friendly. Its primary raw material is obtained from the nearly inexhaustible supply of sodium chloride (salt). Its manufacture has a smaller impact than other plastics, produces virtually no dioxins, and relies on fewer oil by-products than rubber. Vinyl is naturally fire retardant, highly recyclable, and products can be easily manufactured to meet strict indoor air quality (IAQ) requirements.

SUPERIOR SANITARY CONDITIONS


Lonseal flooring is impermeable to moisture, which prevents it from penetrating to the substrate. This also means any contaminants contained within the moisture stay right on the surface for easier cleaning. Further, commercial installations with proper heat or chemically welded seams and flash coving at the walls helps ensure the install meets the strict sanitary requirements for healthcare or similar settings, eliminating places soiling and contamination are able to collect. For installations where flash coving is not possible, suitable sealants may be applied to prevent moisture intrusion at an installation's perimeter. Select products contain Lonseal's GreenMedic® formulation and a factory-applied urethane finish. When coupled with a suitable maintenance program for its application, your Lonseal flooring can be kept to the highest sanitary standards.

EXCEPTIONAL SURFACE PERFORMANCE

While the calendaring method used to create Lonseal flooring allows for versatile designs, it also helps ensure consistency in performance. To improve slip resistance, a variety of textured or embossed surfaces are used, and select products include a factory-applied urethane finish. The layered construction also allows for great wear resistance. These features make our broad line of products suitable to many different applications.

RESILIENT, DURABLE

Lonseal flooring's softness and flexibility do not compromise its performance. It provides superb comfort underfoot, which is beneficial to those who spend a lot of time standing or walking. But it can also endure heavy loads and high traffic, recovering over time and demonstrating its resilience. The frequent healthcare and aircraft applications are great indicators of the flooring's performance in demanding environments.

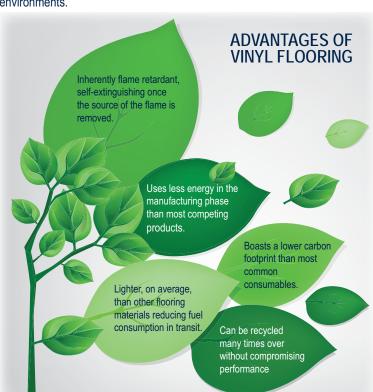



GREENVINYL®

All technical information including installation manuals, specifications, warranties and maintenance guidelines can be found at www.lonseal.com

For complimentary samples, please call 800.832.7111. Outside the U.S., call +1 310.830.7111



WARNING: Cancer and Reproductive Harm • www.P65Warnings.ca.gov

Lonseal, Inc. 928 East 238th Street Carson, CA 90745 USA

www.lonseal.com

