

Coordinating Moldings for YOUR Floor!



Call Toll Free:

1.866.200.8132



**Easy Online
Ordering**

Versatrim.com

**No
Minimums**

Versatrim Molding Information Catalog

EDITION 103

**The Largest Color
Selection in the World**



NEW VERSATRIM PRODUCTS!

INTRODUCING:



Flexible Moldings in 7 Shapes!

Stainable & Paintable!

Available As:

*End Cap
T-Molding
Reducer
Quarter Round
Base Shoe
Wall Base
Colonial Base*

See pages 15-17 for more info.

Available Now!



Contact Your Sales Rep for More Information: **1.866.200.8132**



VersaCap Edge
Matching Stair Solutions
Made from the Actual Floor
See page 13-14 for more info.
Available Now




RSN
Designer PVC Round
Stair Nose
See pages 5, 7, 13, 14 & 18 for more info.
Available Now



Molding Adhesive
Provides An Excellent
Bond for Moldings!
See page 14 for more info.
10.oz Cartridge

COORDINATING MOLDINGS FOR:

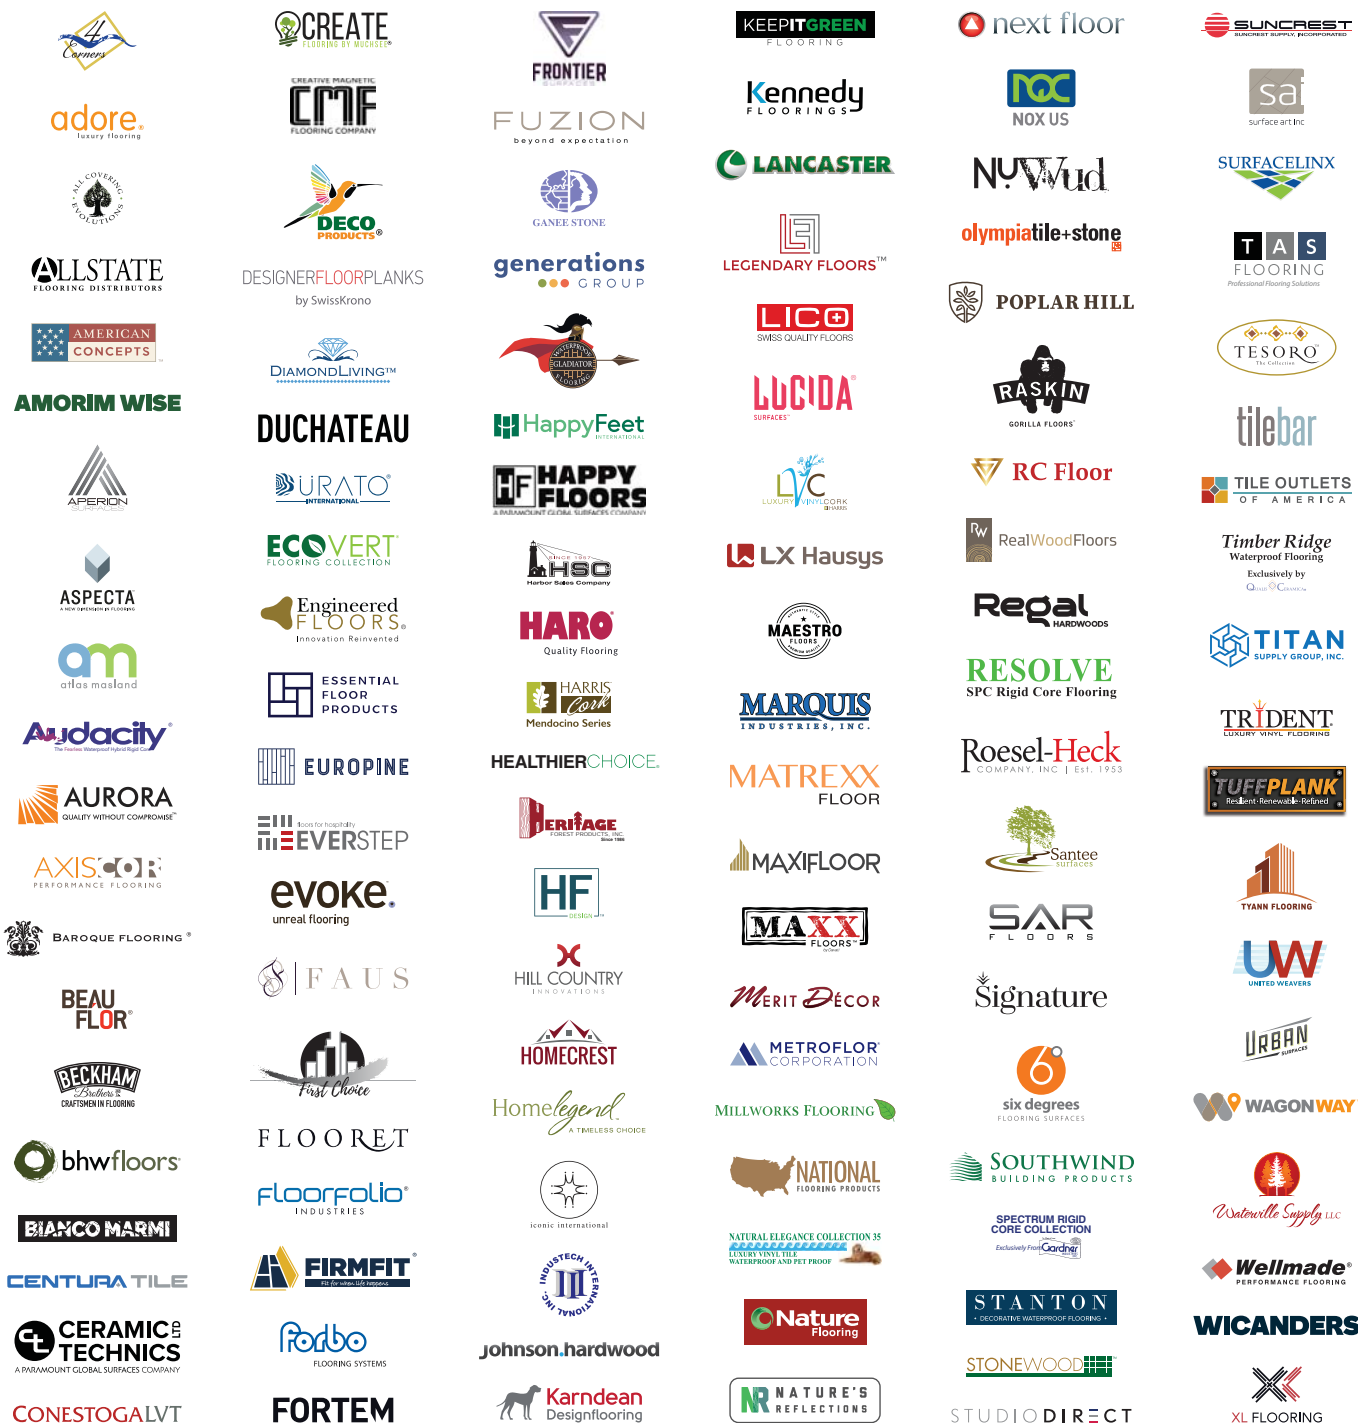

PRODUCTS

MARKETING ASSISTANCE

SHIPPING/LEAD TIME

MOLDING PROGRAMS

NEW PRODUCTS

FLEXIBLE MOLDINGS

VERSATRIM PRICE LIST

**More Colors Added
Every Month!**

No Minimums!

VERSATRIM®
The Leading Molding Brand in North America
1.866.200.8132
versatrim.com



WE OFFER A LIMITED LIFETIME
WARRANTY ON ALL OF OUR MOLDINGS!

FOR MORE INFORMATION ON THIS
AND HOW TO INSTALL OUR MOLDINGS
GO TO WWW.VERSATRIM.COM

Versatrim Molding Information Catalog

- 1 New Products
- 2 Coordinating Moldings Program: Coordinating Moldings for YOUR Floor
- 3 Product Technical Information: Sizes and Applications
- 8 Marketing Assistance: Display Board, Sample Chain, and Color Book
- 9 Shipping/Lead Time: Free Shipping Policy, Transit Times, and Quantities
- 11 How To Order/Program Options: Ordering Made Easy
- 13 Additional Products/New Products
- 15 Flexible Moldings: Versaflex Specs, Install, and Pricing
- 18 Versatrim Price List

We create coordinating moldings for YOUR floor! Call us for more details.

Table of Contents | 2

SlimTrim Technical Information & Applications*

SlimTrim

Our SlimTrim **3-in-1 Molding** functions as a Reducer, T-Molding, and End Cap. Comes with SlimTrack & Versatrack Shim for floors up to 1/4" (6.35mm) or dowels for floors up to 3/4" (19mm). See illustrations below for details.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: PVC

SlimTrack



To be used with SlimTrim for floors up to 1/8" (3mm) thickness. Also, used in conjunction with the Versatrack Shim for 1/8"-1/4" (3-6.35mm). See illustrations below for details.

Material: Cold Roll Steel

Dowel

To be used with SlimTrim for floors up to 3/4" (19mm). Comes as a tree of 8 dowels.


Material: High Density Polyethylene

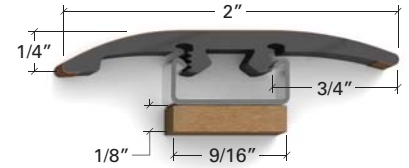

LVT Floors

1 Reducer:

Up to 1/4"
(0-6.35mm)***



Track


2 Transition:

1/16 to 1/8"
(1.6-3mm)***



Track

1/8-1/4"
(3-6.35mm)***




Shim

3 End Cap:

(Hard Surface to Carpet)

Up to 1/4"
(0-6.35mm)***



Track Shim Carpet Tap
Down Trim

WPC Floors

1 Slim Trim-P29

as a Reducer

1/4-3/8"
(6.35-9.5mm)***




SlimTrack Shim

2 Slim Trim-P54

as a Transition

1/4-3/8"
(6.35-9.5mm)***




SlimTrack 2 Shims

Laminate Floors

1 Reducer:


Up to 3/4"
(0-19mm)***



Must Be Glued to
Non-Floating Surface

2 Transition:

Up to 3/4"
(0-19mm)***




Dowel

3 End Cap:

Up to 3/4"
(0-19mm)***

A Carpet Tap
Down Trim**
MUST be Used
When Installing
Slim Trim on
Carpet



Carpet Tap
Down Trim


**Sold at your local hardware store

*The installation instructions shown on this page are suggestions of how to install our moldings. Versatrim does not assume responsibility for any product failure or liability due to installations that are in violation of the flooring manufacturer's installation guidelines and/or warranties.


**For floors thicker than 1/4" (6.35mm), use dowel installation.

***All references to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.


Installing SlimTrim on Concrete*




Install flooring planks, leaving 1 inch gap for molding installation. Draw line on flooring for hole placement. Using a 1/4" concrete drill bit, pre-drill 2" deep holes. With pencil, mark on floor the location of each dowel. **BE SURE TO VACUUM PRE-DRILLED HOLES.**




Lay a flat object over flooring and measure from the concrete at the center between the flooring up to the bottom of your object. This will give you the distance to use on the **Dowel Cutting Template** to the right.



Carefully cut or break dowels from Dowel Tree. Use the **Dowel Cutting Template** to the right to find your measurement on the template and lay your dowel over the number that matches your distance measurement.



With dowel on template, use a utility knife to cut dowel as indicated on **Dowel Cutting Template**. Repeat with all dowels that are to be used.




Clean floor and molding as directed below:

CLEANING PREPARATION FOR BOTH SURFACES:


Preparing the floor & molding as outlined is mandatory to achieve the required bonding strength.

1. Use a damp cloth (water only) to clean both surfaces of loose particles or surface films.
2. Roughen the surfaces with sandpaper (100-150 grit), sanding sponge or metal brush. For flooring, only roughen up area that will be covered (1.25" to 1.5").
3. Degrease both surfaces to remove all traces of oil, grease, dust, and fingerprints by using a solvent such as methyl ethyl ketone (MEK), acetone or isopropyl alcohol.
4. Let both surfaces dry thoroughly before applying adhesive.




Slide dowels into groove on bottom of the Slim Trim molding and position them according to template. Line up dowels with pre-drilled holes. Adjust dowels as needed.


NOTE: Dowels have to fit tightly for the molding to function properly. If you find the dowel is too difficult to slide in, take 100/120 grit sandpaper, lay it flat on a surface and sand down the dowel head slightly with a couple of passes (See Detail A at the right).




DETAIL A



Using both hands, start at one end and gently push molding 1/4" down at a time. It should take several passes to push molding all the way down. Best hand position is holding dowel between pointer fingers and pushing down with thumbs **directly over** dowel. **DO NOT TRY TO PUSH ENTIRE MOLDING IN ALL AT ONCE.**



When molding is a finger's width from the floor, insert tip of glue gun under one edge of molding and apply a polyurethane construction adhesive along one side of the flooring. **MAKE SURE YOU APPLY ADHESIVE TO ONLY ONE SIDE OF THE MOLDING AND THAT ALL SURFACES THAT THE ADHESIVE TOUCHES IS DUST AND DEBRIS FREE.**



When finished applying adhesive, start again at beginning of molding and push dowels all the way down until molding is secure. Use a rubber mallet to gently tap on top of each dowel until molding sits flush. Use pencil marks as reference.

*The installation instructions shown on this page are suggestions of how to install our moldings. Versatrim does not assume responsibility for any product failure or liability due to installations that are in violation of the flooring manufacturer's installation guidelines and/or warranties.

Technical Information — Sizes

T-Molding

T-Moldings are commonly used in doorways to join two laminate floors in adjoining rooms. Also recommended when making a transition from laminate floor to another floor that is approximately the same height. **Available as Standard or Moisture Proof.**

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: *Standard:* Moisture Resistant MDF. *Moisture Proof:* Exterior Grade Composite Wood Product

Reducer

Reducers are used to transition from laminate floors to floors of different height with a minimum height difference of 1/4" (6.35mm). **Available as Standard or Moisture Proof.**

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: *Standard:* Moisture Resistant MDF. *Moisture Proof:* Exterior Grade Composite Wood Product

End Cap

End Caps are used to transition from laminate to carpet, masonry (fireplaces), sliding doors and other exterior door jambs. **Available as Standard or Moisture Proof.**

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: *Standard:* Moisture Resistant MDF. *Moisture Proof:* Exterior Grade Composite Wood Product

Round Stair Nose (RSN)

The Round Stair Nose combines style and function to enhance the beauty of a staircase or step. For use on flooring with an overall thickness of up to 1/2" (12 mm)*.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: PVC

Bullnose Shim (Sold separately)

To be used to install the RSN on Box Staircases to create a rounded step and to add more stabilization.

Material: Standard MDF

VersaEdge

The Standard VersaEdge Stair Nose combines style and function to enhance the beauty of a staircase or step. For use on flooring with an overall thickness of up to 3/4" (19 mm)*.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: PVC

VT-VE(X)-Shim (Sold separately)

Optional use with Round Stair Nose (RSN), VersaEdge, VersaEdge Extra Tall for **flush installations**. Shim-5 for 5-7mm* floors, Shim-8 for 8mm* floors, and Shim-12 for 12mm* floors. See installation examples at bottom of page 7.

Material: Standard MDF/HDF

VersaEdge Extra Tall

The Extra Tall VersaEdge Stair Nose is 1.5" tall to fit staircases or steps that require a longer overhang. For use on flooring with an overall thickness of up to 3/4" (19 mm)*.

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: Aluminum

Stair Nose

The Landing Stair Nose combines style and function to enhance the beauty of a staircase or step. **Available as Standard or Moisture Proof.**

Surface Material: High Wear Resistant Aluminum Oxide Laminate







Core Material: *Standard:* Moisture Resistant MDF. *Moisture Proof:* Exterior Grade Composite Wood Product

Versatrim Shim (VT-Shim) (Sold separately)

Used to raise the Stair Nose when used for 3/8-1/2" (9.5-12.7mm)* flooring.

Material: Standard HDF

*All references to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

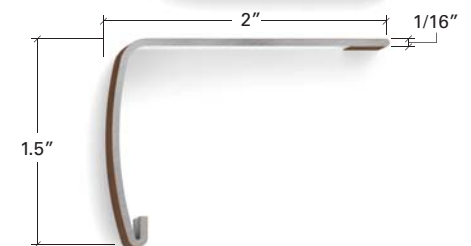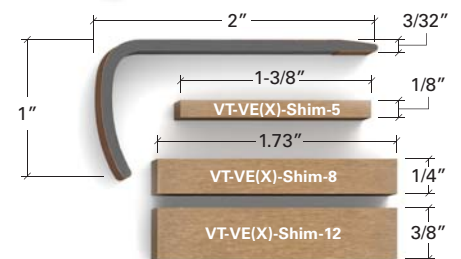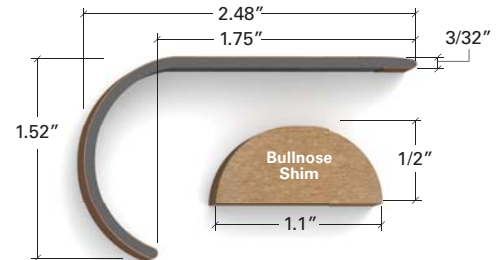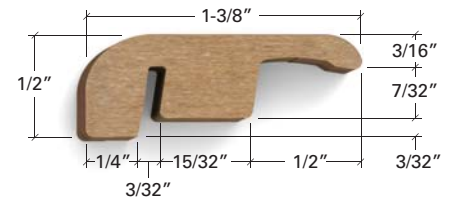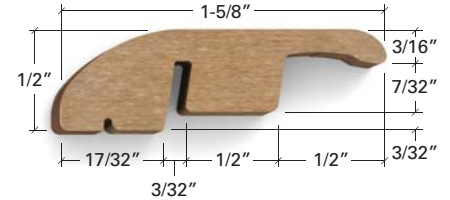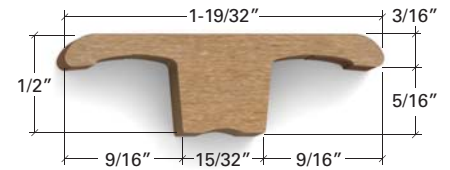

SlimCap

Low profile End Cap for floors up to 1/2" (12.7mm).

Surface Material: High Wear Resistant Aluminum Oxide Laminate

Core Material: PVC

Wall Base

Base molding conceals the joint between an interior wall and the floor. Also used to protect the walls from scuffs and floor cleaning tools.

Surface Material: Decorative Paper

Core Material: Standard MDF

Colonial Base – Available in White Paint Grade Only

Extra tall Colonial Base molding conceals the joint between an interior wall and the floor. Also used to protect the walls from scuffs and floor cleaning tools.

Surface Material: Decorative Paper

Core Material: Standard MDF

Quarter Round

Quarter Rounds are used to conceal the required expansion space between the wall and the laminate flooring. *Available as Standard or Moisture Proof.*

Surface Material: Decorative Paper

Core Material: *Standard:* Standard MDF. *Moisture Proof:* Exterior Grade Composite Wood Product

Base Shoe – Available in White Paint Grade Only

Base Shoes, like Quarter Rounds, are used to conceal the required expansion space between the wall and the laminate flooring.

Surface Material: Decorative Paper

Core Material: Standard MDF

Versatrack (Metal Track)

Can be used with the Versatrack Shim for the installation of T-Molding, Reducer, and End Cap for thickness ranges of 7mm to 18mm* (depending on profile). Please refer to the **Technical Information Applications** section on page 7 for more details.

Material: Cold Roll Steel

Versatrack Shim


Used with Versatrack (Metal Track) installation to extend thickness range up to 6mm*. Please refer to the **Technical Information Applications** section on page 7 for more details.

Material: Standard HDF

Thin Track (Plastic Track)

Can be used for the installation of T-Molding, Reducer, and End Cap for thickness ranges of 9.5mm to 12mm*.

Material: Impact Polystyrene

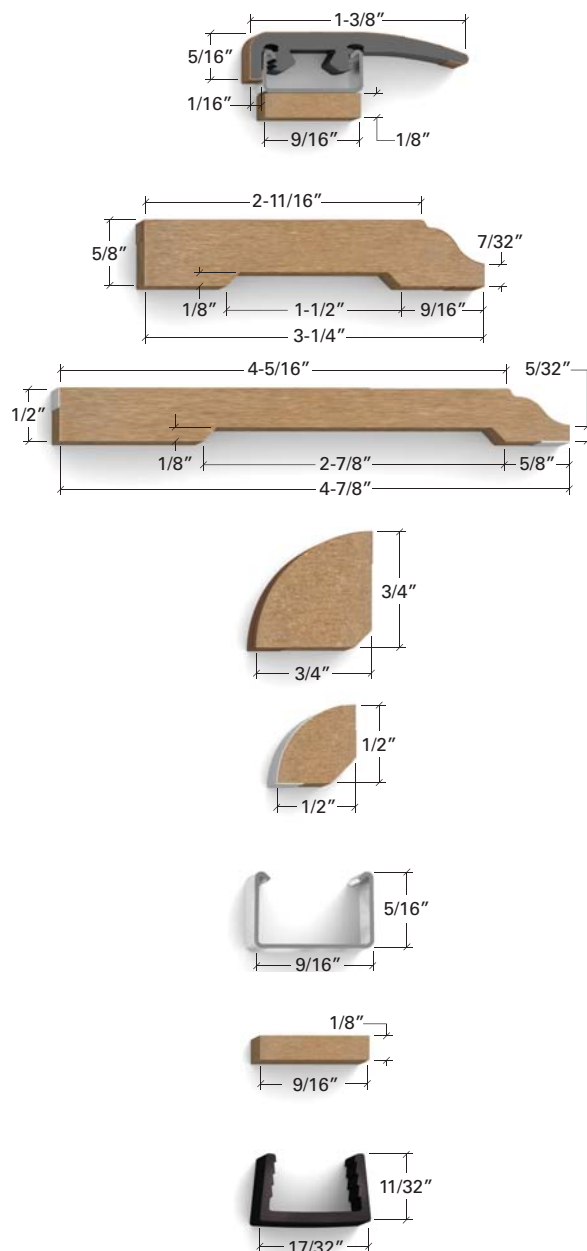

*All references to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

INFORMATION ABOUT OUR MOISTURE PROOF MATERIAL


- The core material is not considered 100% water proof. However, it is moisture, rot, and termite resistant.
- It is treated with zinc borate and manufactured with phenolic resins.
- It has no added urea formaldehyde.
- It is made using sustainable materials and contributes to industry green building programs.
- Caliper swell when saturated in water improves 1-1/2 to 5 times comparing our moisture proof core material to moisture resistant grade and typical MDF.
- In comparison to MDF in internal bucket testing, our moisture proof material exhibited substantially smaller edge cracks after exposure and air drying than typical MDF.




Technical Information — Applications*

This is how the Versatrim molding covers 9/32-45/64" (7-18mm) Flooring. The answer to the problem is a program of moldings designed to work with a metal track.

End Cap, Reducer, and T-Molding

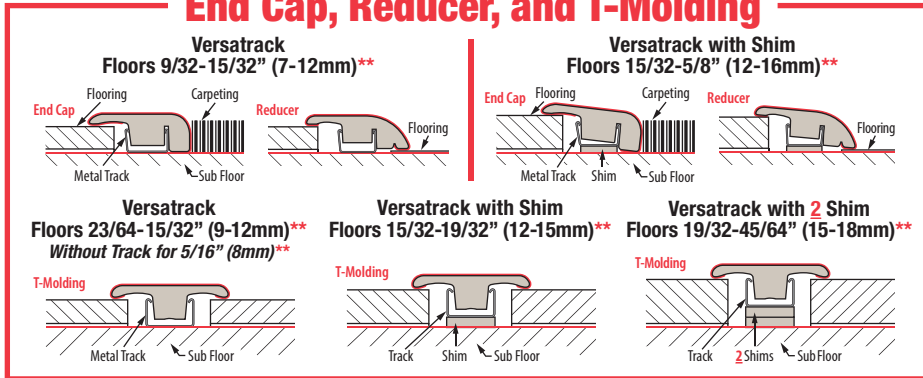

SlimCap (PVC End Cap)

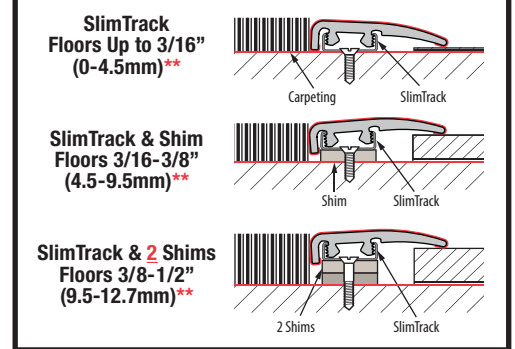

VersaEdge, VersaEdge Extra Tall, and Round Stair Nose (RSN)


VersaEdge and VersaEdge Extra Tall Stair Nose covers floors up to an overall thickness of 3/4" (19mm) and RSN covers floors up to an overall thickness of 12mm.

VersaEdge & VEX

Overlap Install


"Locked-Down" Install

Used where floating of the floor is not required, as with Stair Tread or Glued-Down/Nailed-Down floors. This can be used on floating floors where expansion and contraction will occur on the opposite side of the flooring plane.



"Floating" Install


Used where floating of the floor is required.



Flush Install

"Locked-Down" Install

Used where floating of the floor is not required, as with Stair Tread or Glued-Down/Nailed-Down floors. This can be used on floating floors where expansion and contraction will occur on the opposite side of the flooring plane. Tongue side of plank MUST face the VersaEdge. VersaEdge, Shims, and flooring planks must be glued down to subfloor.

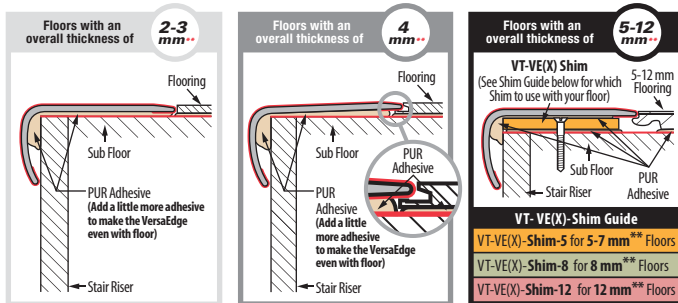


Installation is the same for VersaEdge Extra Tall. VT-VE(X)-SHIMS are sold separately.

Round Stair Nose (RSN)

Overlap Install


"Locked-Down" Install

Used where floating of the floor is not required, as with Stair Tread or Glued-Down/Nailed-Down floors. This can be used on floating floors where expansion and contraction will occur on the opposite side of the flooring plane.




"Floating" Install

Used where floating of the floor is required.




"Lock-Down" on Box Staircase



Flush Install

"Locked-Down" Install

Used where floating of the floor is not required, as with Stair Tread or Glued-Down/Nailed-Down floors. This can be used on floating floors where expansion and contraction will occur on the opposite side of the flooring plane. Tongue side of plank MUST face the VersaEdge. VersaEdge, Shims, and flooring planks must be glued down to subfloor.

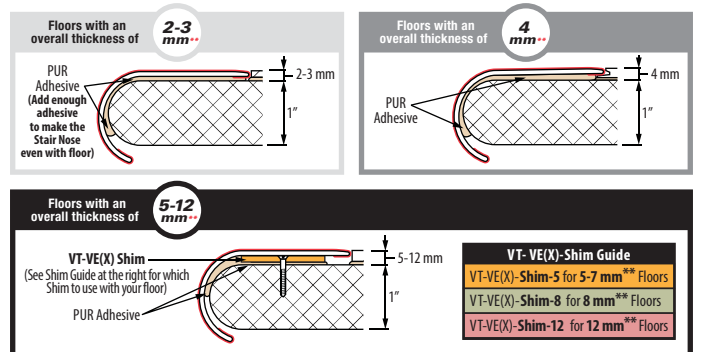

*The installation instructions shown on this page are suggestions of how to install our moldings. Versatrim does not assume responsibility for any product failure or liability due to installations that are in violation of the flooring manufacturer's installation guidelines and/or warranties.

**All references to flooring thickness refer to the total thickness of all members of the floor installation being laid upon the subfloor. This typically is comprised of the flooring plank, e.g. Vinyl or Laminate, the underlayment, either attached or loose lay and any additional vapor barriers.

Need Help Installing? Go to:
www.installationadvice.com

This website is provided as a convenience to our customers for simple Versatrim step-by-step installation instructions as PDFs and easy to follow videos.



Marketing Assistance

Display Board

Our 12" x 42" display board features the 8 Coordinating Moldings profiles: Slim Trim, Slim Cap, VersaEdge, Round Stair Nose, Quarter Round, Moisture Proof End Cap, Moisture Proof Reducer, and Moisture Proof T-Molding.



Profile Chain

The Versatrim Sample Chain represents most of our molding profiles and accessories: Slim Track, VersaTrack Shim, Slim Cap, Slim Trim, VersaEdge, VersaEdge Extra Tall, Round Stair Nose, Quarter Round, End Cap, Reducer, T-Molding, Versatrack, Wall Base.



Standard Color Book

Our 3.75" x 8" color book fits conveniently in a pocket, drawer, or glove compartment and is handy any time you need to match our moldings to your floor. The book represents all standard stock colors.



PRODUCTS

MARKETING ASSISTANCE

SHIPPING/LEAD TIME

MOLDING PROGRAMS

NEW PRODUCTS

FLEXIBLE MOLDINGS

VERSATRIM PRICE LIST

Quantities

	Quantities Per Tube		Quantities Per Box (Pallets Only)	
Moldings	Pieces Per 3" Tube	Pieces Per 6" Tube	Pieces Per Box	Boxes Per Pallet
SlimTrim	8	34	5	220
SlimCap	10	35	5	220
T-Molding	10	45	10	140
Reducer	10	40	10	140
End Cap	12	50	10	140
RSN – Round PVC Stair Nose	4	30	5	220
VersaEdge – Standard	8	40	5	220
VersaEdge Extra Tall	6	35	5	220
Stair Nose	4	19	5	140
Wall Base	NONE	10	5	110
Colonial Base	NONE	7	4	133
Quarter Round	13	50	10	220
Base Shoe	30	110	20	220
Accessories	Pieces Per 3" Tube	Pieces Per 6" Tube	Pieces Per Box	Boxes Per Pallet
Versatrim Shim (VT-Shim)	30	120	25	220
VT-VE(X)-Shim-5	30	120	25	220
VT-VE(X)-Shim-8	12	55	10	220
VT-VE(X)-Shim-12	8	31	8	220
Versatrack Shim <small>Use with Versatrack and SlimTrack</small>	70	280	55	220
Versatrack	50	120	40	110
SlimTrack	80	140	50	110
Thin Track (Versatrim Thin)	50	160	20	220
Dowels - Tree of 8	NA	NA	1000	24
Bullnose Shim	12	50	10	220

Quantities may vary when packaging option selected.

No Minimums to Order

Flat Rate & Free Shipping* Policy

Effective March 1, 2023

Please contact our customer service department for shipping charges for Hawaii, Alaska and any location outside the United States of America.

During the UPS & FedEx Peak Season (October-January) a surcharge will be applied to your order. Please inquire about the additional cost during this time.




Transit Time

Transit times reflect **standard business days** which does not include Saturday or Sunday. **Saturday delivery may be available upon request at an additional cost.**

Lead times are for FedEx Ground Shipments. LTL Shipments with trucking companies have a similar transit time, for exact transit times please contact your sales associate.

Transit may take an additional day or two at times.

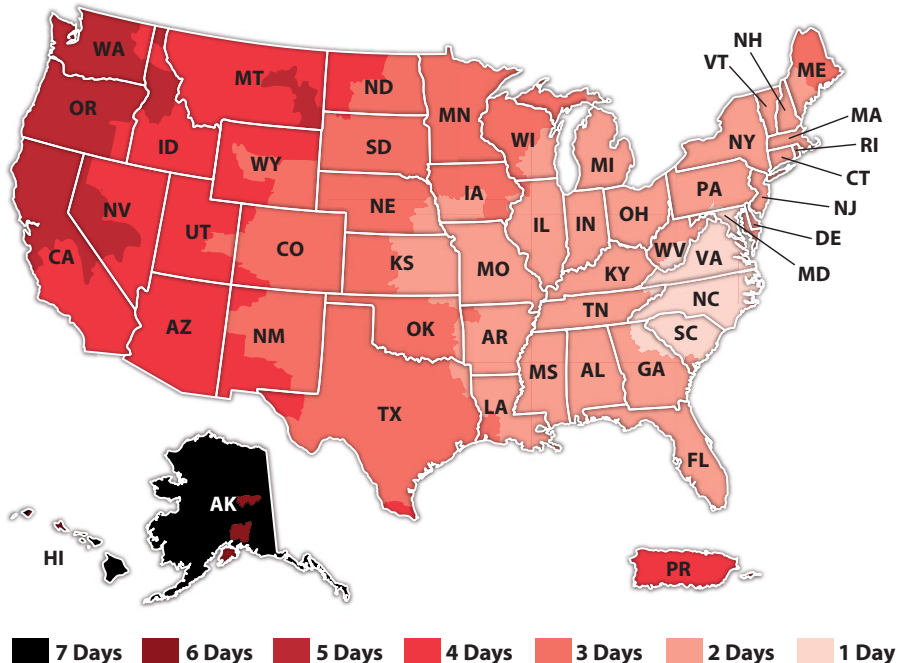



How to Order

To Place an Order With Versatrim:

Fill out 2 forms to establish your credit terms:

- **Credit Application** – We also accept all major credit cards and certified checks in the event that you choose not to have open credit terms with us.
- **Company Contact Form** – This form will enable us to correctly identify your company, to expedite your orders and avoid mistakes.

Both forms are available on versatrim.com under the **How to Order** tab or contact your Sales Rep to have the forms sent to you

Place your order 1 of 4 ways:

- **Order Online** – Simply go to versatrim.com, select the **ORDER ONLINE** button and create an online account with us
- **Fax in a Completed Order Form** – Go to versatrim.com, select the **How to Order** page under the **Resources** tab and download an order form. Fax completed form to 252.430.8801
- **Fax or Email Your Purchase Order from Your System** – Fax your PO to 252.430.8801 or email your PO to orders@versatrim.com
- **Call Us** – Contact our order desk by calling 1.866.200.8132, option 2

Return Policy:

All returns are subject to approval. Call your sales representatives for details.

Molding Program Options

Stocking Inventory Program – 30 Piece Minimum Per Color And Shape

Versatrim can create custom coordinating trims for the floors you send to us. Once the matching process is complete and colors are approved, they will be available for you to order directly from Versatrim. Production will be required for volume quantities of 30 pieces or more in the same shape and color. This process can take 4-6 weeks for production and product to ship from our facility. Volume pricing is available if you qualify. Please contact your Inside Sales Representative at Versatrim for more information.

Quick Ship Program (Stock Colors) – No Minimums

Versatrim offers 60 colors that we keep in stock for quick ship purposes in certain profiles. We have a Standard Stock color board that displays the top colors in the program. We also have a color book to show the entire 60 color collection. Most items will ship in 2 business days.

Coordinating Molding Program (CMP) – No Minimums

Versatrim will create custom coordinating moldings for the floors you send in which once approved would be added to our website www.versatrim.com and made available for any distributor or retailer to order. At this point you can begin to order directly from Versatrim. This would eliminate your need to inventory the moldings as we would inventory the surface material for your colors and would produce the moldings as they are ordered. Once colors are approved and set up in our system, the customer can expect a lead time of up to 4 weeks for any orders that are less than 30 pieces of the same shape and color to be shipped from our facility.

Combo Option: CMP & Direct Ship/Stocking Program

Versatrim will create custom matches for the floors you send in which would be available for all to order. Once the matching process is complete all floors would be added to our website www.versatrim.com. You could then begin stocking, ordering as needed, or submitting orders to direct ship to your customers. We can look at volume/special price programs if you intend to stock. Unless the order is for one of our quick ship program colors and profiles, you can expect a lead time of up to 4 weeks for any orders that are less than 30 pieces of the same shape and color to be shipped from our facility. Orders of 30 pieces or more of the same shape and color can take 4-6 weeks to ship.

Versatrim offers a limited number of free marketing materials and samples for all retailers, distributors, and manufacturers. Please refer to our marketing assistance tab for more information on these options.

For all program options, please send your floors to our print department at the below address:

Versatrim, LLC
Attn: Print Department
101 Eastern Minerals Road
Henderson, NC 27537

Please contact your Versatrim Inside Sales Representative for more details on any programs to accommodate all of your molding needs.

Visit us on the web at www.versatrim.com

Send Us Your Floor and We Will Create A Coordinating Trim. No Minimums! No Inventory!

In order to supply you with the best possible coordinating moldings, we need you to provide us with a **FULL BOX** of planks 36 inches or larger. Planks less than 36" does not give us enough information to create a realistic coordinating molding for the floor.

To help you determine the best plank to send, please follow the guidelines below. **Obviously not all flooring can be perfect. Wood being a natural product will often have some imperfections. With this in mind, please send us the best plank possible.**

PROBLEM WOODS*

*What you put in is what you get out. Send us your best/favorite boards.



Dual Tone



Large Tone Change



Dirty Splotches/Grime/Stains



Large Lines



Character



Knots



Flower



Short Pieces (Less than 36 inches)

NOTE: If sending tile, make sure it doesn't have large patches of extreme differences in tone

PREFERRED PLANK

- Even Tones
- Grain is going in a straight line
- Clean
- Large/Long Pieces, At Least 36" Long



Ask About the RSN


Our New Designer PVC Stair Nose

The new RSN is a low profile stair nose that can be installed flush or overlap. The sleek design is the perfect finish for your modern day look on any staircase.

Please contact your Versatrim Sales Rep for more details and availability.

Lead Time: Up to 4 Weeks

1 Piece Minimum

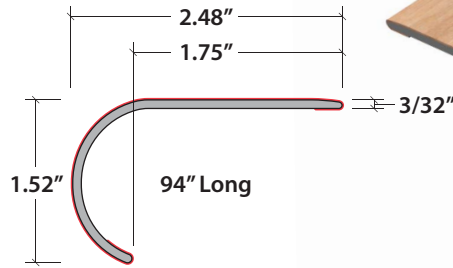

**NEW
Product!**

Matching Stair Solutions


Always Flush & Always a Perfect Match

WE USE THE ACTUAL FLOOR TO MAKE THE CAP!

*This custom product is made-to-order: Once an order is placed it can **not** be canceled and the product can **not** be returned.*

Lead Time: Approximately 15 Business Days


1 Piece Minimum

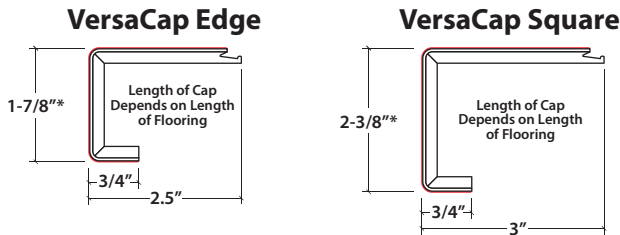

CAN NOT SHIP WITH MOLDINGS

FLOOR TESTING REQUIRED BEFORE AVAILABILITY

VersaCap Edge Tread Edging

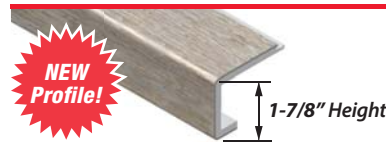

VersaCap Square Tread Edging



Additional Flooring Plank Needed to Make Complete Tread



*Available in Edge and/or Square
Depending on Floor Type*

*Available in
Limited Manufacturers.
Call for Details.*

Free VersaCap Samples

If you are interested in receiving a sample,
email: sales@versatrim.com



**Contact Your Sales
Representative for Details**

Free to Flooring Businesses ONLY

*Since flooring thicknesses vary, to find the inside height dimension of your VersaCap, measure the thickness of your floor, multiply it by 2, and subtract it from the outside height.

**The installation instructions shown on this page are suggestions of how to install our moldings. Versatrim does not assume responsibility for any product failure or liability due to installations that are in violation of the flooring manufacturer's installation guidelines and/or warranties.

***For lower 48 Continental United States only. Please inquire with your Customer Service Representative for Alaska, Hawaii or any other location for freight quotes.

MOLDING ADHESIVE

Early Grab, Fast-Curing Formula • High Strength, Waterproof • Extremely Low VOC



By
VERSATRIM®
The Leading Molding Brand in North America

The ONLY Molding Adhesive You'll Need!

This wet-set, early-grab, fast-curing formula is low-odor and easy-to-clean, leaving no surface residue or ghosting, even once dried. It provides an excellent bond for moldings.

**10 oz.
Cartridge**


**Contact Your Sales
Representative
for Pricing**

Ships FREE with Any Molding Order*

*\$8.50 Flat rate shipping for adhesive only orders. For lower 48 Continental United States only.
Please inquire with your Sales Representative for Alaska, Hawaii, or any other freight quotes.

VERSACAP

ALWAYS FLUSH & ALWAYS A PERFECT MATCH

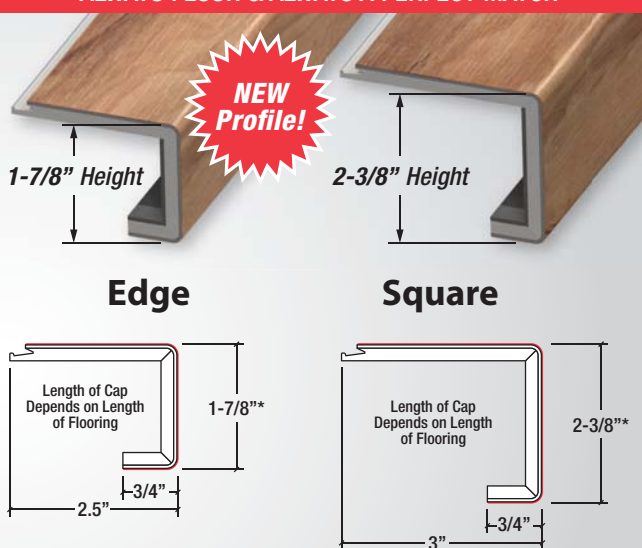


Made from the Actual Floor!

Lead Time: Approximately 15 Business Days

1 Piece Minimum

RSN

OUR NEW DESIGNER PVC STAIR NOSE

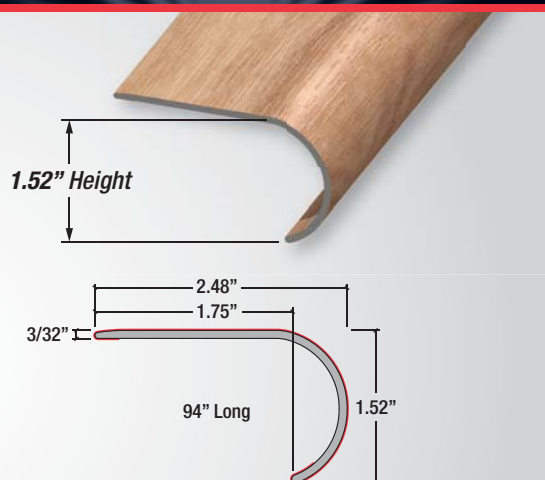

The RSN is a low profile stair nose that can be installed flush or overlap. The sleek design is the perfect finish for your modern day look on any staircase.

Ask your Versatrim Sales Rep for more details & availability.

Lead Time: Up to 4 Weeks

1 Piece Minimum

VERSAFLEX

by Versatrim®

Flexible Moldings in 7 Shapes!
Stainable & Paintable!

End Cap

T-Molding

Reducer

3/4" Quarter Round

1/2" Base Shoe

3-1/4" Wall Base

4-7/8" Colonial Base

End Cap

End Caps are used to transition from laminate to carpet, masonry (fireplaces), sliding doors and other exterior door jambs.

T-Molding

T-Moldings are commonly used in doorways to join two laminate floors in adjoining rooms. Also recommended when making a transition from laminate floor to another floor that is approximately the same height.

Reducer

Reducers are used to transition from laminate floors to floors of different heights with a minimum height difference of 1/4" (6.35mm).

Quarter Round

Quarter Rounds are used to conceal the required expansion space between the wall and the laminate flooring.

Base Shoe








Base Shoes, like Quarter Rounds, are used to conceal the required expansion space between the wall and the laminate flooring.

Wall Base

Base moldings conceal the joint between an interior wall and the floor. Also used to protect the walls from scuffs and floor cleaning tools.

Colonial Base

Colonial Base molding conceals the joint between an interior wall and the floor. Also used to protect the walls from scuffs and floor cleaning tools.

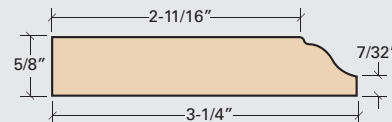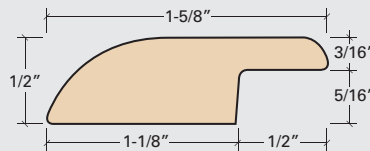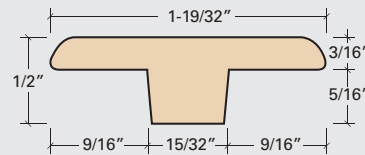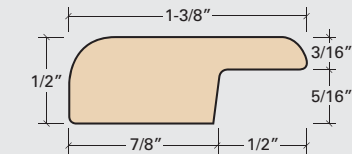

Core Material: Polyurethane Composite Material

All Moldings Are 94" Long

HOW TO INSTALL

USE: Versaflex moldings are designed for interior and exterior use. This product is stable and will not absorb moisture. However, the use of a paint or gel stain and sealer is recommended for all applications.

MACHINING: Conventional woodworking tools can be used with this material. Material can be cut, sanded and shaped with ease. Miter saws work well when trimming this material. As with all types of trim material, use care when marking and cutting.

CONDITIONING: Conditioning Versaflex in a warm room (70 to 75°) for 1/2 a day will make it more flexible.

FASTENING: Always install Versaflex moldings in a relaxed position. Use construction or panel adhesive or mastic type glue continuously on back side and nails to secure molding material in place until adhesive bonds.

- **DO NOT** use staples to fasten material.
- Keep nails to a minimum, no closer than 6" between nails.
- Do not nail closer than 3/8" from edge of molding.

CLEANING: Prior to finishing, clean the molding by wiping with a cloth using soap and water, paint thinner or any mild solvent to clean any dirt or grease that may have accumulated during installation.

PAINT & STAINING: Versaflex is paint grade. Moldings with the Oak Wood Grain or Paint Grade (No Grain) can be painted with a latex or oil based paint. **Only moldings with the Oak Wood Grain can stained**, using a gel type stain.



by Versatrim

**Flexible...
Stainable...
Anything's Imaginable!**

AVAILABLE PROFILES
Contact Your Sales Rep for Pricing



End Cap

120336 - Oak Wood Grain
Available in Wood Grain Only



T-Molding

120336 - Oak Wood Grain
Available in Wood Grain Only



Reducer

120336 - Oak Wood Grain
Available in Wood Grain Only




Quarter Round

120335 - Paint Grade (No Grain)
120336 - Oak Wood Grain



Base Shoe

120335 - Paint Grade (No Grain)
120336 - Oak Wood Grain



Wall Base

120335 - Paint Grade (No Grain)
120336 - Oak Wood Grain



Colonial Base

120335 - Paint Grade (No Grain)
120336 - Oak Wood Grain

Lead Time: Ships from our facility in 1 business day for orders up to 5 pieces
No Minimums

**Same Shipping Rate & Transit Time
as Our Standard Moldings**

End Cap

Reducer

1/2" Base Shoe

3-1/4" Wall Base

T-Molding

3/4" Quarter Round

4-7/8" Colonial Base

Ask your sales representative for more details on Volume Pricing. Installer/Contractor, please call for details & pricing.

Price List

(FOB Henderson, NC)

		Standard Stock Colors	Custom Colors/ Coordinating Moldings	Coordinating Moldings
Quantities		1 Piece	30 Pieces and Up**	1 to 29 Pieces
Lead Time		1 to 2 Business Days on Most Items*	3 to 4 Weeks	Up to 3 Weeks
Returns		Item is Returnable	Custom Product: Non-Returnable	Custom Product: Non-Returnable
Effective 5/23/22 SLT P29 SLT P31 SLT P32 SLT P33 SLT P54	 SlimTrim-P29 For Vinyl/LVT Floors Up to 6.35 mm (1/4")			
	 SlimTrim-P31 For Vinyl/WPC/LVT/Laminate Up to 19 mm (3/4")			
	 SlimTrim-P32 For Laminate Floors Up to 19 mm (3/4")			
	 SlimTrim-P33 For Vinyl/LVT Floors Under 3 mm (1/8")			
	 SlimTrim-P54 For WPC/LVT Floors 6.35 to 9.5 mm (1/4-3/8")			
	 Additional Dowel Tree Use with SlimTrim on Floors up to 19mm (3/4"). Contains 8 Dowels			
RSN SCAP P29 RSN SCAP P54	 Additional SlimTrack Use in conjunction with Versatrack Shim on SlimTrim for floors up to 9.5 mm (3/8") and SlimCap for floors up to 12.7mm (1/2").			
	 Additional Versatrack Shim Use with SlimTrack for SlimTrim on 3-9.5mm floors, and SlimCap on 5-12.7mm floors			
	 SlimCap-P29 For Up to 9.5 mm (3/8") Floors			
	 SlimCap-P54 For 10 to 12.7 mm (3/8" to 1/2") Floors			
	 RSN Round PVC Stair Nose			
	 Bullnose Shim Use with RSN for installation on Box Staircases			
VEX VE	 VersaEdge Stair Nose 1" Height			
	 VersaEdge Extra Tall Stair Nose 1.5" Height			
	 VT-VE(X)-Shim-5 For VE, RSN, or VEX for Optional Flush Install on 5-7 mm floors			
	 VT-VE(X)-Shim-8 For VE, RSN, or VEX for Optional Flush Install on 8 mm floors			
	 VT-VE(X)-Shim-12 For VE, RSN, or VEX for Optional Flush Install on 12 mm floors			
	 End Cap <i>Hardware not included</i>			
RD TM EC	 T-Molding <i>Hardware not included</i>			
	 Reducer <i>Hardware not included</i>			
	 Versatrack - OPTIONAL For Reducer, T-Molding, & End Cap on 6-9.5 mm floors			
	 Versatrack Shim - OPTIONAL Use with Versatrack for Reducer, T-Molding, & End Cap on 9.5-12.7 mm floors			
	 Thin Track - OPTIONAL For Reducer, T-Molding, & End Cap on 7-9.5 mm floors			
	 Stair Nose			
SN	 Versatrim Shim For Stair Nose on 12 mm floors - OPTIONAL			
	 Wall Base 3.25" High			
	 Colonial Base 4.875" High			
	 Quarter Round Available in Standard or Moisture Proof			
	 Base Shoe			

All Moldings are 94" Long

Follow lead times above.

*Stock Color VersaEdge Extra Tall, SlimCap, Round Stair Nose, and Moisture Proof Moldings (Reducer, End Cap, T-Molding, Stair Nose & Quarter Round) are made to order and are non-returnable.

**Customer is expected to accept & pay for a 10% over or under run on Custom Color moldings.

Terms: Credit applications are under the "How To Order" tab on the Versatrim website.

Pricing Subject to Change / Cancellation Fee Could Apply

We have several pricing structures available to accommodate your needs ranging from one piece to volume orders. Call for more details.

Pricing | 18

PRODUCTS

MARKETING ASSISTANCE

SHIPPING/LEAD TIME

MOLDING PROGRAMS

NEW PRODUCTS

FLEXIBLE MOLDINGS

VERSATRIM PRICE LIST



Flexible Moldings in 7 Shapes!

Stainable & Paintable!

End Cap

T-Molding

Reducer

3/4" Quarter Round

1/2" Base Shoe

3-1/4" Wall Base

4-7/8" Colonial Base



1.866.200.8132